

CTXTM

TOWER DRYER




DELUX
Continuous Flow GRAIN DRYERS

COMMERCIAL GRAIN DRYERS

SPECIFICATIONS

Model Name	CTX3200	CTX4000	CTX4500	CTX5000	CTX6500	CTX7500	CTX10000
Capacity Corn (20% - 15%)	3,200	4,000	4,500	5,000	6,500	7,500	10,000
Capacity Corn (25% - 15%)	1,920	2,400	2,700	3,000	3,900	4,500	6,000
Length	25'	25'	30'	30'	40'	45'	50'
Fill Height	82'	94'	94'	102'	98'	102'	122'
Fans - HP	3 - 60HP	3- 75HP	4 - 60HP	4 - 75HP	5 - 75HP	6 - 75HP	8 - 75HP
Leveling Conveyor HP	3	5	5	5	7½	10	15
Discharge Conveyor HP	3	5	5	5	7½	10	15
Metering HP	2	2	2	2	2	3	3
Total Dryer HP	188	237	252	312	392	473	533
Total Holding	3,610	4,290	4,944	5,352	6,864	8,028	10,620
Total CFM	166,500	205,600	235,000	258,509	329,011	387,763	528,768
Average BTU Consumption	19,101,000	22,472,000	26,967,000	29,663,000	37,754,000	44,495,000	60,676,000

¹Drying capacity and fuel consumption may be affected by test weight, variety, maturity, excessive fines or foreign material, ambient temperatures and humidity.

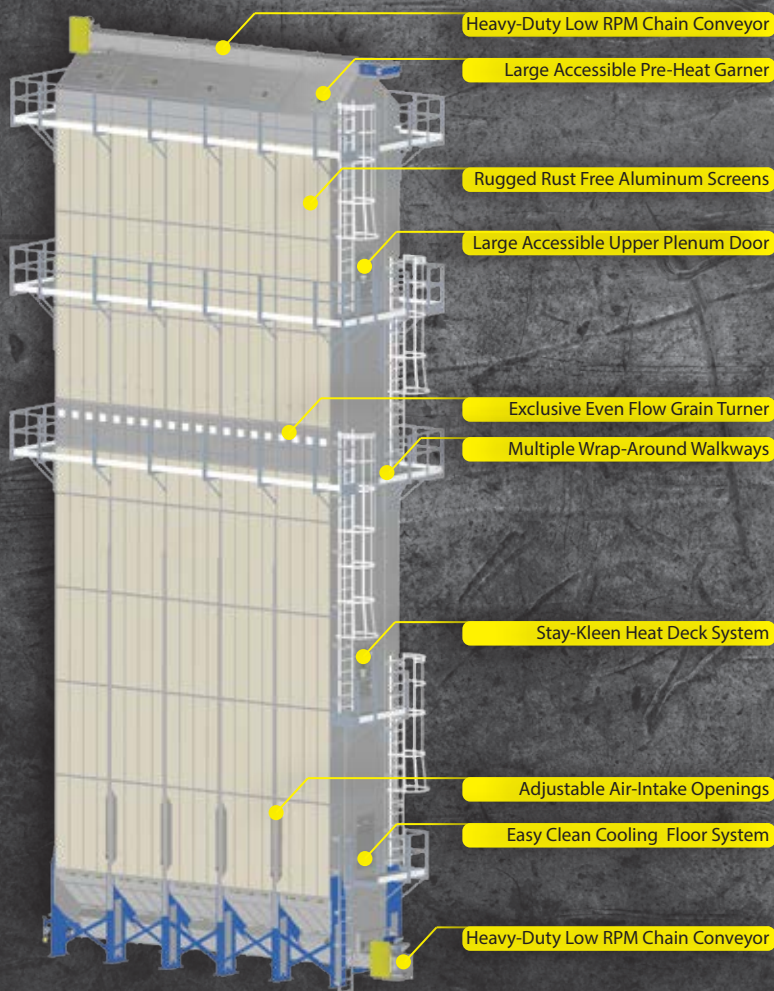

Our proprietary PLC based control is designed and driven from 50 years of industry expertise. A state of the art touchscreen allows the operator to run the dryer and control exiting grain moisture with ease. Remotely view, change variables and track dryer performance with a click of a button, from a desktop PC or mobile device. Operators will also have peace of mind knowing that service personnel can remotely troubleshoot many of the problems that previously required an on-site visit.